

GRAFILIT® MultiForce NG is an expanded graphite (nuclear grade) based material with multiple stainless steel foil inserts, thus facilitating its handling, cutting and enhances the surface load. GRAFILIT® MultiForce NG has excellent chemical and thermal resistance. Its high creep resistance and high compressibility make it suitable for highly demanding conditions in nuclear power stations and in the chemical and petrochemical industries. The combination of an anti-oxidation inhibitor with a very low percentage of sulphur content makes this material the perfect solution for most gasket applications in Nuclear Power Stations.



PROPERTIES

	MECHANICAL RESISTANCE	THERMAL RESISTANCE	SEALABILITY PERFORMANCE	CHEMICAL RESISTANCE
SUPERIOR				
EXCELLENT				
VERY GOOD				
GOOD				
MODERATE				

APPROPRIATE INDUSTRIES & APPLICATIONS

	WATER SUPPLY
	STEAM SUPPLY
	GAS SUPPLY
	CHEMICAL INDUSTRY
	PETROCHEMICAL INDUSTRY
	POWER PLANT
	REFRIGERATION AND COOLING
	HEATING SYSTEMS
	HIGH TEMP. APPLICATIONS
	COMPRESSORS AND PUMPS
	VALVES

Composition	Expanded natural graphite (carbon content > 99 % graphite nuclear grade purity), impregnated with anti-oxidation inhibitor, multiple stainless steel (AISI 316L) flat foil inserts (thickness 0.05 mm).
Colour	Black
Approvals	Fire Safe according to API 6FB, DVGW DIN 3535-6, BAM (Oxygen) In compliance with: DVGW VP401 (fire safe)


TECHNICAL DATA

Typical values for a thickness of 2.0 mm (3 inserts in 0.05 mm)

Density	DIN 28090-2	g/cm ³	1.1
Compressibility	ASTM F36A	%	35
Recovery	ASTM F36A	%	> 20
Stress resistance	DIN 52913		
16 h, 50 MPa, 300 °C		MPa	>= 49
Specific leak rate	DIN 3535-6	mg/(s·m)	< 0.02
Total Chloride content	FSA NMG 202	ppm	< 25
Total Sulfur content		ppm	< 200
Total Halogen content		ppm	< 200
Ash content of graphite	DIN 51903	%	< 1.0
Oxidation rate in air at 670°C	LECO TGA	%/hr	<= 3
Compression modulus	DIN 28090-2		
At room temperature: ϵ_{KSW}		%	35
At elevated temperature: $\epsilon_{WSW/300\text{ }^{\circ}\text{C}}$		%	<= 3
Percentage creep relaxation			
At room temperature: ϵ_{KRW}		%	5
At elevated temperature: $\epsilon_{WRW/300\text{ }^{\circ}\text{C}}$		%	4
Operating conditions			
Minimum temperature		°C/°F	-200/-328
Continuous temperature			
- oxidizing atmosphere		°C/°F	550/1022
- reducing or inert atmosphere		°C/°F	700/1292
Pressure		bar/psi	250/2900

P-T DIAGRAM

EN 1514-1, Type IBC, PN 40, DIN 28091-2 / 3.8, 2.0 mm

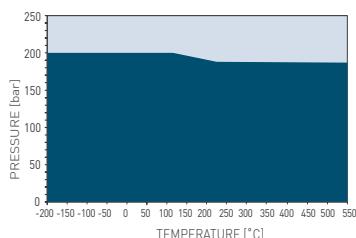

■ General suitability - Appropriate measures ensure maximum performance for joint design and gasket installation.

■ Limited suitability - Technical consultation is mandatory.

Dimensions of standard sheets

Sheet size (mm): 1000 x 1000 | 1500 x 1500

Thickness (mm): 1.0 | 1.5 | 2.0 | 3.0

Other dimensions and thicknesses are available on request.

Acetamide	+
Acetic acid, 10%	+
Acetic acid, 100% (Glacial)	?
Acetone	+
Acetonitrile	+
Acetylene [gas]	+
Acid chlorides	?
Acrylic acid	+
Acrylonitrile	+
Adipic acid	+
Air [gas]	+
Alcohols	+
Aldehydes	+
Alum	?
Aluminium acetate	?
Aluminium chloride	?
Aluminium chloride	-
Aluminium sulfate	+
Amines	+
Ammonia [gas]	+
Ammonium bicarbonate	+
Ammonium chloride	?
Ammonium hydroxide	+
Amyl acetate	+
Anhydrides	+
Aniline	+
Anisole	+
Argon [gas]	+
Asphalt	+
Barium chloride	?
Benzaldehyde	+
Benzene	+
Benzoic acid	+
Bio-diesel	+
Bio-ethanol	+
Black liquor	?
Borax	+
Boric acid	+
Butadiene [gas]	+
Butane [gas]	+
Butyl alcohol (Butanol)	+
Butyric acid	+
Calcium chloride	?
Calcium hydroxide	+
Carbon dioxide [gas]	+
Carbon monoxide [gas]	+
Cellosolve	+
Chlorine [gas]	?
Chlorine (in water)	
Chlorobenzene	+
Chloroform	+
Chloroprene	+
Chlorosilanes	?
Chromic acid	-
Citric acid	?
Copper acetate	+
Copper sulfate	+
Creosote	+
Cresols (Cresylic acid)	+
Cyclohexane	+
Cyclohexanol	+
Cyclohexanone	+
Decalin	+
Dextrin	+
Dibenzyl ether	+
Dibutyl phthalate	+
Dimethylacetamide (DMA)	+
Dimethylformamide (DMF)	+

Dioxane	+
Diphyl (Dowtherm A)	+
Esters	+
Ethane [gas]	+
Ethers	+
Ethyl acetate	+
Ethyl alcohol (Ethanol)	+
Ethyl cellulose	+
Ethyl chloride [gas]	+
Ethylene [gas]	+
Ethylene glycol	+
Formaldehyde (Formalin)	+
Formamide	+
Formic acid, 10%	
Formic acid, 85%	?
Formic acid, 100%	?
Freon-12 (R-12)	+
Freon-134a (R-134a)	+
Freon-22 (R-22)	+
Fruit juices	+
Fuel oil	+
Gasoline	+
Gelatin	+
Glycerine (Glycerol)	+
Glycols	+
Helium [gas]	+
Heptane	+
Hydraulic oil (Glycol based)	+
Hydraulic oil (Mineral type)	+
Hydraulic oil (Phosphate ester based)	+
Hydrazine	+
Hydrocarbons	+
Hydrochloric acid, 10%	-
Hydrochloric acid, 37%	-
Hydrofluoric acid, 10%	-
Hydrofluoric acid, 48%	-
Hydrogen [gas]	+
Iron sulfate	+
Isobutane [gas]	+
Isooctane	+
Isoprene	+
Isopropyl alcohol (Isopropanol)	+
Kerosene	+
Ketones	+
Lactic acid	?
Lead acetate	+
Lead arsenate	+
Magnesium sulfate	+
Maleic acid	+
Malic acid	?
Methane [gas]	+
Methyl alcohol (Methanol)	+
Methyl chloride [gas]	+
Methylene dichloride	+
Methyl ethyl ketone (MEK)	+
N-Methyl-pyrrolidone (NMP)	+
Milk	+
Mineral oil (ASTM no.1)	+
Motor oil	+
Naphtha	+
Nitric acid, 10%	?
Nitric acid, 65%	?
Nitrobenzene	+
Nitrogen [gas]	+
Nitrous gases (NOx)	?
Octane	+
Oils (Essential)	+
Oils (Vegetable)	+

OLEIC acid	+
Oleum [Sulfuric acid, fuming]	-
Oxalic acid	?
Oxygen [gas]	+
Ethers	+
Ethyl acetate	+
Ethyl alcohol (Ethanol)	+
Ethyl cellulose	+
Ethyl chloride [gas]	+
Ethylene [gas]	+
Ethylene glycol	+
Formaldehyde (Formalin)	+
Formamide	+
Formic acid, 10%	
Formic acid, 85%	?
Formic acid, 100%	?
Freon-12 (R-12)	+
Freon-134a (R-134a)	+
Freon-22 (R-22)	+
Fruit juices	+
Fuel oil	+
Gasoline	+
Gelatin	+
Glycerine (Glycerol)	+
Glycols	+
Helium [gas]	+
Heptane	+
Hydraulic oil (Glycol based)	+
Hydraulic oil (Mineral type)	+
Hydraulic oil (Phosphate ester based)	+
Hydrazine	+
Hydrocarbons	+
Hydrochloric acid, 10%	-
Hydrochloric acid, 37%	-
Hydrofluoric acid, 10%	-
Hydrofluoric acid, 48%	-
Hydrogen [gas]	+
Iron sulfate	+
Isobutane [gas]	+
Isoctane	+
Isoprene	+
Isopropyl alcohol (Isopropanol)	+
Kerosene	+
Ketones	+
Lactic acid	?
Lead acetate	+
Lead arsenate	+
Magnesium sulfate	+
Maleic acid	+
Malic acid	?
Methane [gas]	+
Methyl alcohol (Methanol)	+
Methyl chloride [gas]	+
Methylene dichloride	+
Methyl ethyl ketone (MEK)	+
N-Methyl-pyrrolidone (NMP)	+
Milk	+
Mineral oil (ASTM no.1)	+
Motor oil	+
Naphtha	+
Nitric acid, 10%	?
Nitric acid, 65%	?
Nitrobenzene	+
Nitrogen [gas]	+
Nitrous gases (NOx)	?
Octane	+
Oils (Essential)	+
Oils (Vegetable)	+

CHEMICAL RESISTANCE CHART

The recommendations made here are intended as a guideline for the selection of the suitable gasket type. As the function and durability of products is dependent upon a number of factors, the data may not be used to support any warranty claims.

+

Recommended

?

Recommendation depends on operating conditions

-

Not recommended



M. Wilhelmsen A/S

Åbyvej 69

8230 Åbyhøj

Tlf: +45 86 15 01 11

Fax: 86 15 56 71

Email: mw@mw.dk